

ZERO KNOWS

19" RACKMOUNT CASES

WARRIOR WITH SHOCK MOUNTS, DOUBLE ENTRY

BUYERS GUIDE AND PART NUMBER BUILDER

SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE
FOR QUESTIONS, CALL 1.800.959.5050 • FOR A QUOTE CALL, FAX OR EMAIL

CASE NUMBER

ZDR **U SIZE** **BODY** **RACK** **FRONT** **REAR**

U SIZE
☐ 04-4U
☐ 05-5U
☐ 06-6U
☐ 07-7U
☐ 08-8U
☐ 09-9U
☐ 10-10U
☐ 11-11U
☐ 12-12U
☐ 14-14U
☐ 15-15U

BODY DEPTH
☐ 21" ☐ 24" ☐ 27" ☐ 30"

RACK DEPTH
☐ 18-18"/457 mm
☐ 21-21"/534 mm
☐ 24-24"/610 mm
☐ 27-27"/686 mm
☐ 30-30"/762 mm

COVERS (INTERIOR DEPTH)
☐ 03-3"/76 mm
☐ 05-5"/127 mm

COLORS
☐ BK-Black 27040
☐ DB-Dark Blue 25102
☐ DS-Desert Sand 33446
☐ FG-Forest Green 24052
☐ GR-Gray 26270
☐ MR-Maroon PMS 202
☐ MB-Medium Blue 25190
☐ NA-Natural
☐ NG-NATO Green RAL6014
☐ OD-Olive Drab 24097
☐ OR-Orange 12197
☐ RD-Red 21105
☐ WH-White 27925
☐ YW-Yellow 23785
FED-STD-595 for reference.

SHOCK MOUNTS (EQUIPMENT WEIGHT)
☐ 01-20 to 49 lbs ▲
☐ 02-50 to 80 lbs
☐ 03-81 to 150 lbs
☐ 04-151 to 250 lbs
☐ 05-251 to 350 lbs
☐ 06-351 to 500 lbs
Call for loads over 350 lbs.

STANDARD RACKFRAME LOAD RANGES

Shock Mounts Per System	Load Ranges (lbs/kg) For Equipment Installed in Rack
8 ea	20 to 49 lbs / 9.1 to 22.2 kg
8 ea	50 to 80 lbs / 22.7 to 36.3 kg
8 ea	81 to 150 lbs / 36.8 to 68.1 kg
16 ea	151 to 250 lbs / 68.6 to 113.5 kg
16 ea	251 to 340 lbs / 113.8 to 154.2 kg

ENVIRONMENT
☐ 00-None Required
☐ HI-Humidity Indicator
☐ PV-Pressure Valve
COMBINATIONS
☐ PH-PV and HI
☐ WT-Watertight, PV
☐ WV-WT, HI, PV
Watertight may not be combined with Locking Hasp.

RACK HOLES
☐ 00-Standard EIA
☐ M5-M5 Metric Tapped
☐ M6-M6 Metric Tapped
☐ SQ-Square

SHELVES/DRAWERS
☐ 00-None Required
☐ EA-Equipment Angles
☐ FS-Fixed Shelf
☐ IR-Intermediate Rails
☐ KT-Keyboard Tray
☐ RS-Rack Slides
☐ SD-Sliding Drawer
☐ SF-Sliding Shelf

HARDWARE
☐ 00 - Standard: Zinc Chromate Handle and Hardware
☐ LL - Zinc Chromate Handle and Hardware, Locking Hasp
☐ BH - Black Metal Handle and Hardware
☐ BL - Black Metal Handle, Hardware, Locking Hasp
☐ PO - Plastic Black Handle, Zinc Hardware
☐ PB - Plastic Black Handle, Black Hardware
☐ PS - Plastic Black Handle, Stainless Steel Hardware
☐ P1 - Plastic Black Handle, Zinc Hardware, Locking Hasp
☐ P2 - Plastic Black Handle, Stainless Steel Hardware, Locking Hasp
☐ P3 - Plastic Black Handle, Black Hardware, Locking Hasp
☐ SS - Stainless Steel Handle and Hardware
☐ LS - Stainless Steel Handle and Hardware, Locking Hasp
Handle material types may not be combined.

OTHER OPTIONS
☐ 00-None Required
☐ CA-Removable Casters (4)
☐ CH-Card Holder
☐ CR-Chair
☐ CS-Coupling Straps
☐ LR-Lifting/Tie Down Rings
☐ SP-Storage Pouch
☐ TB-Table

COMBINATIONS
☐ Z1-CH, SP
☐ Z2-CA, CS
☐ Z3-CA, CH, CS, SP
☐ Z4-CA, CH, CS, LR, SP
☐ Z5-CH, LR
☐ Z6-CS, SP
☐ ZC-CA, LR
☐ ZD-CA, CH, LR
☐ ZE-CA, CH, LR, SP
☐ ZF-CA, SP

THE ZERO WARRIOR RACKMOUNT CASE
 is a rotomolded, double entry case designed and engineered to provide complete protection for the most sensitive E.I.A 19" rackmountable equipment and instrumentation.

WARRIOR Rackmount cases meet the rigors of virtually all conditions including extreme temperatures, altitude, rain, sleet, snow, sand, and dust. Protection unparalleled in the industry. Warrior Cases are also available through our Quick-Ship Program.

Details available at:
www.zerocases.com/quickship

QS

ITAR, AS9100 Rev. C and ISO 9001:2008 Certified

HOW TO ORDER CASES

Standard Cases:

- Go to www.zerocases.com/contact-us.html to find your local distributor or reseller.
- Call 800-959-5050 or email orders@zerocases.com to place an order directly with ZERO.

Customized Cases:

- Go to www.zerocases.com/contact-us.html to find your local representative and request a quote or email your RFQ to quotes@zerocases.com

Quick-Ship Cases:

- Go to www.zerocases.com/quickship to see options for low-quantity orders with shorter lead times.

Call 1.800.500.9376 for engineering & design assistance to meet specific requirements and custom colors.



Lifting Rings: Verify the application does not exceed the load carrying capacity of the lifting rings or case.

Stacking: Verify weight and support.

Shock Mounts: Equipment loads over 150 lbs (68 kg).

NOTES:

● Watertight Option not available with Locking Hasps.



▲ Select #01 Shock Mounts for 21" Case Body.




✦ Quick-Ship not available. Requires additional lead time.



ZERO MANUFACTURING, INC. | 500 West 200 North, North Salt Lake, Utah 84054 USA

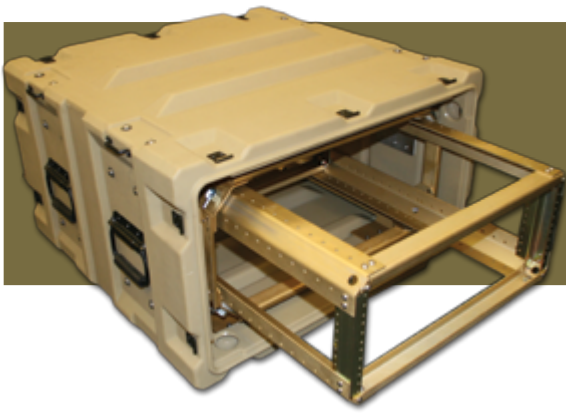
Toll Free US 800-500-ZERO (9376) | Direct 801-298-5900 | Fax 801-292-9450 | Email sales@zerocases.com | Web

www.zerocases.com

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D+E	CASE HEIGHT in/mm F	VOL- UME cubic ft/m	WEIGHT lb/kg	SWAY +/-	QUICK SHIP	ZERO PART #	NSN	WARRIOR ZDR 4U-6U
4U 7.12" (181 mm)	21/534	18/457	9/229	16.00/406	7.7/.22	51.0/23.1			ZDR042118-0303		WARRIOR ZDR Shock Mount includes a 19" Rack. All weights are approximate. Std load range: 20-80 lbs (9.1-36.3 kg) +/- = Sway space to be increased or decreased dependent on customer selection. ▼ = Decreased Sway Space QS = Quick-Ship is Available Drawing Specifications: Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm) Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm) Case Width G = 27.25 in (692 mm)    
			11/279		7.9/.22	52.0/23.5			ZDR042118-0305		
			13/330		8.4/.24	54.0/24.5			ZDR042118-0505		
		21/534	9/229		7.7/.22	51.0/23.1			ZDR042121-0303		
			11/279		7.9/.22	52.0/23.5			ZDR042121-0305		
			13/330		8.4/.24	54.0/24.5			ZDR042121-0505		
	24/610	21/534	9/229	16.00/406	8.4/.24	54.0/24.5			ZDR042421-0303		
			11/279		8.7/.25	55.0/24.9			ZDR042421-0305		
			13/330		9.2/.26	57.0/25.9			ZDR042421-0505		
		24/610	9/229		8.4/.24	54.0/24.5			ZDR042424-0303		
			11/279		8.7/.25	55.0/24.9			ZDR042424-0305		
			13/330		9.2/.26	57.0/25.9			ZDR042424-0505		
	27/686	24/610	9/229	16.00/406	9.1/.26	57.0/25.9		QS	ZDR042724-0303	8145-01-582-5650	
			11/279		9.5/.27	58.0/26.3		QS	ZDR042724-0305	8145-01-582-5666	
			13/330		10.0/.28	60.0/27.3		QS	ZDR042724-0505		
		27/686	9/229		9.1/.26	57.0/25.9			ZDR042727-0303		
			11/279		9.5/.27	58.0/26.3			ZDR042727-0305		
			13/330		10.0/.28	60.0/27.3			ZDR042727-0505		
	30/762	27/686	9/229	16.00/406	9.8/.28	60.0/27.3		QS	ZDR043027-0303	8145-01-582-5683	
			11/279		10.3/.29	61.0/27.7		QS	ZDR043027-0305	8145-01-582-5684	
			13/330		10.8/.31	63.0/28.6		QS	ZDR043027-0505		
		30/762	9/229		9.8/.28	60.0/27.3			ZDR043030-0303		
			11/279		10.3/.29	61.0/27.7			ZDR043030-0305		
			13/330		10.8/.31	63.0/28.6			ZDR043030-0505		
5U 8.87" (225 mm)	21/534	18/457	9/229	17.75/451	7.6/.22	61.0/27.7			ZDR052118-0303		
			11/279		9.0/.25	62.0/28.1			ZDR052118-0305		
			13/330		9.3/.26	64.0/29.0			ZDR052118-0505		
		21/534	9/229		7.6/.22	61.0/27.7			ZDR052121-0303		
			11/279		9.0/.25	62.0/28.1			ZDR052121-0305		
			13/330		9.3/.26	64.0/29.0			ZDR052121-0505		
	24/610	21/534	9/229	17.75/451	8.7/.25	64.0/29.5			ZDR052421-0303		
			11/279		9.8/.28	65.0/30.0			ZDR052421-0305		
			13/330		10.2/.29	67.0/30.4			ZDR052421-0505		
		24/610	9/229		8.7/.25	64.0/29.5			ZDR052424-0303		
			11/279		9.8/.28	65.0/30.0			ZDR052424-0305		
			13/330		10.2/.29	67.0/30.4			ZDR052424-0505		
	27/686	24/610	9/229	17.75/451	9.8/.28	67.0/30.4		QS	ZDR052724-0303	8145-01-582-5687	
			11/279		10.6/.30	68.0/30.9		QS	ZDR052724-0305	8145-01-582-5690	
			13/330		11.1/.31	70.0/31.8		QS	ZDR052724-0505		
		27/686	9/229		9.8/.28	67.0/30.4			ZDR052727-0303		
			11/279		10.6/.30	68.0/30.9			ZDR052727-0305		
			13/330		11.1/.31	70.0/31.8			ZDR052727-0505		
	30/762	27/686	9/229	17.75/451	10.9/.31	70.0/31.8		QS	ZDR053027-0303	8145-01-582-5691	
			11/279		11.4/.32	71.0/32.2		QS	ZDR053027-0305	8145-01-582-5435	
			13/330		12.0/.34	73.0/33.1		QS	ZDR053027-0505		
		30/762	9/229		10.9/.31	70.0/31.8			ZDR053030-0303		
			11/279		11.4/.32	71.0/32.2			ZDR053030-0305		
			13/330		12.0/.34	73.0/33.1			ZDR053030-0505		
6U 10.63" (270 mm)	24/610	21/534	9/229	17.75/451	9.9/.28	60.0/27.2	+/-		ZDR062421-0303		
			11/279		10.3/.29	61.0/27.7	+/-		ZDR062421-0305		
			13/330		11.1/.31	63.0/28.6	+/-		ZDR062421-0505		
		24/610	9/229		9.9/.28	60.0/27.2	+/-		ZDR062424-0303		
			11/279		10.3/.29	61.0/27.7	+/-		ZDR062424-0305		
			13/330		11.1/.31	63.0/28.6	+/-		ZDR062424-0505		
	27/686	24/610	9/229	17.75/451	10.8/.31	63.0/28.6	+/-	QS	ZDR062724-0303	8145-01-582-5438	
			11/279		11.3/.32	64.0/29.1	+/-	QS	ZDR062724-0305	8145-01-582-5447	
			13/330		12.0/.34	66.0/30.0	+/-	QS	ZDR062724-0505		
		27/686	9/229		10.8/.31	63.0/28.6	+/-		ZDR062727-0303		
			11/279		11.3/.32	64.0/29.1	+/-		ZDR062727-0305		
			13/330		12.0/.34	66.0/30.0	+/-		ZDR062727-0505		
	30/762	27/686	9/229	17.75/451	11.7/.33	66.0/30.0	+/-	QS	ZDR063027-0303	8145-01-582-5454	
			11/279		12.3/.35	67.0/30.4	+/-	QS	ZDR063027-0305	8145-01-582-5460	
			13/330		12.9/.37	69.0/31.4	+/-	QS	ZDR063027-0505		
		30/762	9/229		11.7/.33	66.0/30.0	+/-		ZDR063030-0303		
			11/279		12.3/.35	67.0/30.4	+/-		ZDR063030-0305		
			13/330		12.9/.37	69.0/31.4	+/-		ZDR063030-0505		

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D+E	CASE HEIGHT in/mm F	VOL- UME cubic ft/m	WEIGHT lb/kg	SWAY +/-	QUICK SHIP	ZERO PART #	NSN	WARRIOR ZDR 7U-10U
7U 12.37" (314 mm)	24/610	21/534	9/229	21.25/540	11.0/.31	64.0/29.0			ZDR072421-0303		WARRIOR ZDR Shock Mount includes a 19" Rack. All weights are approximate. Std load range: 20-80 lbs (9.1-36.3 kg) +/- = Sway space to be increased or decreased dependent on customer selection. ⬇ = Decreased Sway Space QS = Quick-Ship is Available Drawing Specifications: Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm) Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm) Case Width G = 27.25 in (692 mm)
			11/279		11.7/.33	65.0/29.4			ZDR072421-0305		
			13/330		12.4/.35	67.0/30.4			ZDR072421-0505		
		24/610	9/229		11.0/.31	64.0/29.0			ZDR072424-0303		
			11/279		11.7/.33	65.0/29.4			ZDR072424-0305		
			13/330		12.4/.35	67.0/30.4			ZDR072424-0505		
	27/686	24/610	9/229	21.25/540	12.0/.34	66.0/30.0		QS	ZDR072724-0303	8145-01-582-5467	
			11/279		12.7/.36	67.0/30.4		QS	ZDR072724-0305	8145-01-582-5476	
			13/330		13.4/.38	69.0/31.4		QS	ZDR072724-0505		
		27/686	9/229		12.0/.34	66.0/30.0			ZDR072727-0303		
			11/279		12.7/.36	67.0/30.4			ZDR072727-0305		
			13/330		13.4/.38	69.0/31.4			ZDR072727-0505		
	30/762	27/686	9/229	21.25/540	13.0/.37	68.0/30.9		QS	ZDR073027-0303	8145-01-582-5488	
			11/279		13.7/.39	69.0/31.4		QS	ZDR073027-0305	8145-01-582-5496	
			13/330		14.4/.41	71.0/32.2		QS	ZDR073027-0505		
		30/762	9/229		13.0/.37	68.0/30.9			ZDR073030-0303		
			11/279		13.7/.39	69.0/31.4			ZDR073030-0305		
			13/330		14.4/.41	71.0/32.2			ZDR073030-0505		
8U 14.12" (358 mm)	24/610	21/534	9/229	21.25/540	11.9/.34	69.0/31.4	+/-		ZDR082421-0303		   
			11/279		12.6/.36	70.0/31.8	+/-		ZDR082421-0305		
			13/330		13.4/.38	72.0/32.7	+/-		ZDR082421-0505		
		24/610	9/229		11.9/.34	69.0/31.4	+/-		ZDR082424-0303		
			11/279		12.6/.36	70.0/31.8	+/-		ZDR082424-0305		
			13/330		13.4/.38	72.0/32.7	+/-		ZDR082424-0505		
	27/686	24/610	9/229	21.25/540	13.0/.37	71.0/32.2	+/-	QS	ZDR082724-0303	8145-01-582-5218	
			11/279		13.7/.39	72.0/32.7	+/-	QS	ZDR082724-0305	8145-01-582-5155	
			13/330		14.5/.41	74.0/33.6	+/-	QS	ZDR082724-0505		
		27/686	9/229		13.0/.37	71.0/32.2	+/-		ZDR082727-0303		
			11/279		13.7/.39	72.0/32.7	+/-		ZDR082727-0305		
			13/330		14.5/.41	74.0/33.6	+/-		ZDR082727-0505		
	30/762	27/686	9/229	21.25/540	14.1/.40	73.0/33.1	+/-	QS	ZDR083027-0303	8145-01-582-5241	
			11/279		14.8/.42	74.0/33.6	+/-	QS	ZDR083027-0305	8145-01-582-5278	
			13/330		15.6/.44	76.0/34.5	+/-	QS	ZDR083027-0505		
		30/762	9/229		14.1/.40	73.0/33.1	+/-		ZDR083030-0303		
			11/279		14.8/.42	74.0/33.6	+/-		ZDR083030-0305		
			13/330		15.6/.44	76.0/34.5	+/-		ZDR083030-0505		
9U 15.87" (403 mm)	24/610	21/534	9/229	24.75/629	12.2/.35	75.0/34.1			ZDR092421-0303		Need Assistance? Call 1.800.959.5050 to speak to Sales and Quoting Service Reps or send an email to quotes@zerocases.com ©2015 ZERO MANUFACTURING INC., ZERO CASES (UK) LTD. ALL RIGHTS RESERVED. ZERO reserves the right to modify product specifications, features and information. Technical information is known to be correct at the time of publication.
			11/279		13.6/.38	76.0/34.5			ZDR092421-0305		
			13/330		14.3/.40	78.0/35.4			ZDR092421-0505		
		24/610	9/229		12.2/.35	75.0/34.1			ZDR092424-0303		
			11/279		13.6/.38	76.0/34.5			ZDR092424-0305		
			13/330		14.3/.40	78.0/35.4			ZDR092424-0505		
	27/686	24/610	9/229	24.75/629	13.7/.39	77.0/35.0		QS	ZDR092724-0303	8145-01-582-5317	
			11/279		14.8/.42	78.0/35.4		QS	ZDR092724-0305	8145-01-582-5325	
			13/330		15.6/.44	80.0/36.3		QS	ZDR092724-0505		
		27/686	9/229		13.7/.39	77.0/35.0			ZDR092727-0303		
			11/279		14.8/.42	78.0/35.4			ZDR092727-0305		
			13/330		15.6/.44	80.0/36.3			ZDR092727-0505		
	30/762	27/686	9/229	24.75/629	15.2/.43	79.0/35.0		QS	ZDR093027-0303	8145-01-582-5333	
			11/279		16.0/.45	80.0/35.4		QS	ZDR093027-0305	8145-01-582-5339	
			13/330		16.7/.47	82.0/36.6		QS	ZDR093027-0505		
		30/762	9/229		15.2/.43	79.0/35.0			ZDR093030-0303		
			11/279		16.0/.45	80.0/35.4			ZDR093030-0305		
			13/330		16.7/.47	82.0/36.6			ZDR093030-0505		
10U 17.62" (448 mm)	24/610	21/534	9/229	24.75/629	13.7/.39	79.0/35.8	+/-		ZDR102421-0303		Need Assistance? Call 1.800.959.5050 to speak to Sales and Quoting Service Reps or send an email to quotes@zerocases.com ©2015 ZERO MANUFACTURING INC., ZERO CASES (UK) LTD. ALL RIGHTS RESERVED. ZERO reserves the right to modify product specifications, features and information. Technical information is known to be correct at the time of publication.
			11/279		14.5/.41	80.0/36.2	+/-		ZDR102421-0305		
			13/330		15.5/.44	82.0/37.3	+/-		ZDR102421-0505		
		24/610	9/229		13.7/.39	79.0/35.8	+/-		ZDR102424-0303		
			11/279		14.5/.41	80.0/36.2	+/-		ZDR102424-0305		
			13/330		15.5/.44	82.0/37.3	+/-		ZDR102424-0505		
	27/686	24/610	9/229	24.75/629	15.0/.42	81.0/36.8	+/-	QS	ZDR102724-0303	8145-01-582-5129	
			11/279		15.8/.45	82.0/37.2	+/-	QS	ZDR102724-0305	8145-01-582-5081	
			13/330		16.7/.47	84.0/38.2	+/-	QS	ZDR102724-0505		
		27/686	9/229		15.0/.42	81.0/36.8	+/-		ZDR102727-0303		
			11/279		15.8/.45	82.0/37.2	+/-		ZDR102727-0305		
			13/330		16.7/.47	84.0/38.2	+/-		ZDR102727-0505		
	30/762	27/686	9/229	24.75/629	16.3/.46	83.0/37.6	+/-	QS	ZDR103027-0303	8145-01-582-7460	
			11/279		17.1/.48	84.0/38.2	+/-	QS	ZDR103027-0305	8145-01-582-7486	
			13/330		17.9/.51	86.0/39.1	+/-	QS	ZDR103027-0505		
		30/762	9/229		16.3/.46	83.0/37.6	+/-		ZDR103030-0303		
			11/279		17.1/.48	84.0/38.2	+/-		ZDR103030-0305		
			13/330		17.9/.51	86.0/39.1	+/-		ZDR103030-0505		

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D+E	CASE HEIGHT in/mm F	VOL- UME cubic ft/m	WEIGHT lb/kg	SWAY +/-	QUICK SHIP	ZERO PART #	NSN	WARRIOR ZDR 11U-15U
11U 19.38" (492 mm)	24/610	21/534	9/229	28.25/718	14.7/.42	80.0/36.2			ZDR112421-0303		WARRIOR ZDR Shock Mount includes a 19" Rack. All weights are approximate. Std load range: 20-80 lbs (9.1-36.3 kg) +/- = Sway space to be increased or decreased dependent on customer selection. ▼ = Decreased Sway Space QS = Quick-Ship is Available Drawing Specifications: Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm) Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm) Case Width G = 27.25 in (692 mm)
			11/279		15.6/.44	81.0/36.6			ZDR112421-0305		
			13/330		16.5/.47	83.0/37.6			ZDR112421-0505		
		24/610	9/229		14.7/.42	80.0/36.2			ZDR112424-0303		
			11/279		15.6/.44	81.0/36.6			ZDR112424-0305		
			13/330		16.5/.47	83.0/37.6			ZDR112424-0505		
	27/686	24/610	9/229	28.25/718	16.0/.45	82.0/37.2		QS	ZDR112724-0303	8145-01-582-7491	
			11/279		16.9/.48	83.0/37.6		QS	ZDR112724-0305	8145-01-582-7683	
			13/330		17.8/.50	85.0/38.6		QS	ZDR112724-0505		
		27/686	9/229		16.0/.45	82.0/37.2			ZDR112727-0303		
			11/279		16.9/.48	83.0/37.6			ZDR112727-0305		
			13/330		17.8/.50	85.0/38.6			ZDR112727-0505		
	30/762	27/686	9/229	28.25/718	17.3/.49	84.0/38.2		QS	ZDR113027-0303	8145-01-582-7690	
			11/279		18.2/.52	85.0/38.6		QS	ZDR113027-0305	8145-01-582-7725	
			13/330		19.1/.54	87.0/39.5		QS	ZDR113027-0505		
		30/762	9/229		17.3/.49	84.0/38.2			ZDR113030-0303		
			11/279		18.2/.52	85.0/38.6			ZDR113030-0305		
			13/330		19.1/.54	87.0/39.5			ZDR113030-0505		
12U 21.25" (536 mm)	24/610	21/534	9/229	28.25/718	15.6/.44	80.0/36.2	▼		ZDR122421-0303		   
			11/279		16.5/.47	81.0/36.6	▼		ZDR122421-0305		
			13/330		17.5/.50	83.0/37.6	▼		ZDR122421-0505		
		24/610	9/229		15.6/.44	80.0/36.2	▼		ZDR122424-0303		
			11/279		16.5/.47	81.0/36.6	▼		ZDR122424-0305		
			13/330		17.5/.50	83.0/37.6	▼		ZDR122424-0505		
	27/686	24/610	9/229	28.25/718	17.0/.48	82.0/37.2	▼	QS	ZDR122724-0303		
			11/279		17.9/.51	83.0/37.6	▼	QS	ZDR122724-0305		
			13/330		18.9/.53	85.0/38.6	▼	QS	ZDR122724-0505	6625-01-543-2932	
		27/686	9/229		17.0/.48	82.0/37.2	▼		ZDR122727-0303		
			11/279		17.9/.51	83.0/37.6	▼		ZDR122727-0305		
			13/330		18.9/.53	85.0/38.6	▼		ZDR122727-0505		
	30/762	27/686	9/229	28.25/718	18.4/.52	84.0/38.2	▼	QS	ZDR123027-0303	8145-01-582-7730	
			11/279		19.3/.55	85.0/38.6	▼	QS	ZDR123027-0305	8145-01-582-7734	
			13/330		20.3/.57	87.0/39.5	▼	QS	ZDR123027-0505		
		30/762	9/229		18.4/.52	84.0/38.2	▼		ZDR123030-0303		
			11/279		19.3/.55	85.0/38.6	▼		ZDR123030-0305		
			13/330		20.3/.57	87.0/39.5	▼		ZDR123030-0505		
14U 24.62" (625 mm)	24/610	21/534	9/229	33.50/785	17.2/.49	85.0/38.6			ZDR142421-0303		 
			11/279		18.4/.52	86.0/39.1			ZDR142421-0305		
			13/330		19.3/.55	88.0/40.0			ZDR142421-0505		
		24/610	9/229		17.2/.49	85.0/38.6			ZDR142424-0303		
			11/279		18.4/.52	86.0/39.1			ZDR142424-0305		
			13/330		19.3/.55	88.0/40.0			ZDR142424-0505		
	27/686	24/610	9/229	33.50/785	18.9/.53	87.0/39.5		QS	ZDR142724-0303	8145-01-582-7898	
			11/279		20.0/.57	88.0/40.0		QS	ZDR142724-0305	8145-01-582-8177	
			13/330		21.0/.59	90.0/40.9		QS	ZDR142724-0505		
		27/686	9/229		18.9/.53	87.0/39.5			ZDR142727-0303		
			11/279		20.0/.57	88.0/40.0			ZDR142727-0305		
			13/330		21.0/.59	90.0/40.9			ZDR142727-0505		
	30/762	27/686	9/229	33.50/785	20.6/.58	89.0/40.5		QS	ZDR143027-0303		
			11/279		21.6/.61	90.0/40.9		QS	ZDR143027-0305		
			13/330		22.7/.64	92.0/41.8		QS	ZDR143027-0505	5895-01-552-9388	
		30/762	9/229		20.6/.58	89.0/40.5			ZDR143030-0303		
			11/279		21.6/.61	90.0/40.9			ZDR143030-0305		
			13/330		22.7/.64	92.0/41.8			ZDR143030-0505		
15U 26.37" (670 mm)	24/610	21/534	9/229	33.50/851	18.4/.52	85.0/38.7	▼		ZDR152421-0303		Need Assistance? Call 1.800.959.5050 to speak to Sales and Quoting Service Reps or send an email to quotes@zerocases.com ©2015 ZERO MANUFACTURING INC., ZERO CASES (UK) LTD. ALL RIGHTS RESERVED. ZERO reserves the right to modify product specifications, features and information. Technical information is known to be correct at the time of publication.
			11/279		19.3/.55	86.0/39.1	▼		ZDR152421-0305		
			13/330		20.6/.58	88.0/40.0	▼		ZDR152421-0505		
		24/610	9/229		18.4/.52	85.0/38.7	▼		ZDR152424-0303		
			11/279		19.3/.55	86.0/39.1	▼		ZDR152424-0305		
			13/330		20.6/.58	88.0/40.0	▼		ZDR152424-0505		
	27/686	24/610	9/229	33.50/851	20.0/.57	87.0/39.5	▼	QS	ZDR152724-0303	8145-01-582-8182	
			11/279		21.0/.59	88.0/40.0	▼	QS	ZDR152724-0305	8145-01-582-8187	
			13/330		22.2/.63	90.0/40.9	▼	QS	ZDR152724-0505		
		27/686	9/229		20.0/.57	87.0/39.5	▼		ZDR152727-0303		
			11/279		21.0/.59	88.0/40.0	▼		ZDR152727-0305		
			13/330		22.2/.63	90.0/40.9	▼		ZDR152727-0505		
	30/762	27/686	9/229	33.50/851	21.6/.61	89.0/40.5	▼	QS	ZDR153027-0303	8145-01-582-8263	
			11/279		22.7/.64	90.0/40.9	▼	QS	ZDR153027-0305	8145-01-582-8276	
			13/330		23.8/.67	92.0/41.8	▼	QS	ZDR153027-0505		
		30/762	9/229		21.6/.61	89.0/40.5	▼		ZDR153030-0303		
			11/279		22.7/.64	90.0/40.9	▼		ZDR153030-0305		
			13/330		23.8/.67	92.0/41.8	▼		ZDR153030-0505		



ZERO KNOWS

19" RACKMOUNT CASES

WARRIOR WITH REMOVABLE RACK

BUYERS GUIDE AND PART NUMBER BUILDER

SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE
FOR QUESTIONS, CALL 1.800.959.5050, FOR A QUOTE CALL, FAX OR EMAIL

CASE NUMBER

ZDRR **U SIZE** **BODY** **RACK** **FRONT** **REAR**

U SIZE
☐ 04-4U
☐ 05-5U
☐ 06-6U
☐ 07-7U
☐ 08-8U

BODY DEPTH
☐ 21"▲
☐ 24"
☐ 27"
☐ 30"

RACK DEPTH
☐ 18-18"/457 mm
☐ 21-21"/534 mm
☐ 24-24"/610 mm
☐ 27-27"/686 mm
☐ 30-30"/762 mm

COVERS (INTERIOR DEPTH)
☐ 03-3"/76 mm
☐ 05-5"/127 mm

COLORS
☐ BK-Black 27040
☐ DB-Dark Blue 25102
☐ DS-Desert Sand 33446
☐ FG-Forest Green 24052
☐ GR-Gray 26270
☐ MR-Maroon PMS 202
☐ MB-Medium Blue 25190
☐ NA-Natural
☐ NG-NATO Green RAL6014
☐ OD-Olive Drab 24097
☐ OR-Orange 12197
☐ RD-Red 21105
☐ WH-White 27925
☐ YW-Yellow 23785
Color numbers to FED-STD-595 for reference.

SHOCK MOUNTS (EQUIPMENT WEIGHT)
☐ 01-20 to 49 lbs▲ (9.1 to 22.2 kg)
☐ 02-50 to 80 lbs (22.7 to 36.3 kg)
☐ 03-81 to 150 lbs (36.8 to 68 kg)
Call for loads over 150 lbs.

ENVIRONMENT
☐ 00-None Required
☐ HI-Humidity Indicator
☐ PV-Pressure Valve
COMBINATIONS
☐ PH-PV, HI
☐ WT-Watertight, PV
☐ WV-WT, HI, PV
Watertight may not be combined with Locking Hasp.

RACK HOLES
☐ 00-Standard EIA
☐ M5-M5 Metric Tapped
☐ M6-M6 Metric Tapped
☐ SQ-Square

SHELVES/DRAWERS
☐ 00-None Required
☐ EA-Equipment Angles
☐ FS-Fixed Shelf
☐ IR-Intermediate Rails
☐ KT-Keyboard Tray
☐ RS-Rack Slides
☐ SD-Sliding Drawer
☐ SF-Sliding Shelf

OTHER OPTIONS
☐ 00-None Required
☐ CA-Removable Casters (4)
☐ CH-Card Holder
☐ CR-Chair
☐ CS-Coupling Straps
☐ LR-Lifting/Tie Down Rings
☐ SP-Storage Pouch
☐ TB-Table

COMBINATIONS
☐ Z1-CH, SP
☐ Z2-CA, CS
☐ Z3-CA, CH, CS, SP
☐ Z4-CA, CH, CS, LR, SP
☐ Z5-CH, LR
☐ Z6-CS, SP
☐ ZC-CA, LR
☐ ZD-CA, CH, LR
☐ ZE-CA, CH, LR, SP
☐ ZF-CA, SP

HARDWARE
☐ 00 - Standard: Zinc Chromate Handle and Hardware
☐ LL - Zinc Chromate Handle and Hardware, Locking Hasp
☐ BH - Black Metal Handle and Hardware
☐ BL - Black Metal Handle, Hardware, Locking Hasp
☐ P0 - Plastic Black Handle, Zinc Hardware
☐ PB - Plastic Black Handle, Black Hardware
☐ PS - Plastic Black Handle, Stainless Steel Hardware
☐ P1 - Plastic Black Handle, Zinc Hardware, Locking Hasp
☐ P2 - Plastic Black Handle, Stainless Steel Hardware, Locking Hasp
☐ P3 - Plastic Black Handle, Black Hardware, Locking Hasp
☐ SS - Stainless Steel Handle and Hardware
☐ LS - Stainless Steel Handle and Hardware, Locking Hasp
Handle material types may not be combined.

THE ZERO WARRIOR REMOVABLE RACK CASE is a rotomolded, double entry case designed and engineered to provide complete protection for the most sensitive E.I.A 19" rackmountable equipment and instrumentation.

The Removable Rackmount Case meets the rigors of virtually all conditions including extreme altitude, rain, sleet, snow, sand, temperatures, and dust.

KEY FEATURES

- Shock-mounted Removable Rack
- Flexibility to build to custom needs
- Strong, lightweight polyethylene construction
- Portable, stackable and rugged
- Variety of standard & custom finishes and colors

STANDARD RACKFRAME LOAD RANGES

Shock Mounts Per System	Load Ranges (lbs/kg) For Equipment Installed in Rack
8 ea	20 to 49 lbs / 9.1 to 22.2 kg
8 ea	50 to 80 lbs / 22.7 to 36.3 kg
8 ea	81 to 150 lbs / 36.8 to 68.1 kg

Standard Equipment Load Ranges

Call 1.800.500.9376 for engineering & design assistance to meet specific requirements, specific colors and customization.

Lifting Rings: Verify the application does not exceed the load carrying capacity of the lifting rings or case.
Stacking: Verify weight and support.
Shock Mounts: Equipment loads over 150 lbs (68 kg).

NOTES:
Quick-Ship not available for Removable Rack Cases.
 ▲ Select #01 Shock Mounts for 21" Case Body.
 ○ Watertight Valve not available with Locking Hasps.



HOW TO ORDER CASES

Standard Cases:

1. Go to www.zerocases.com/contact-us.html to find your local distributor or reseller.
2. Call 800-959-5050 or email orders@zerocases.com to place an order directly with ZERO.

Customized Cases:

1. Go to www.zerocases.com/contact-us.html to find your local representative and request a quote or email your RFQ to quotes@zerocases.com

www.zerocases.com

ZERO MANUFACTURING, INC. | 500 West 200 North, North Salt Lake, Utah 84054 USA

Toll Free US 800-500-ZERO (9376) | Direct 801-298-5900 | Fax 801-292-9450 | Email sales@zerocases.com | Web

www.zerocases.com

ZERO KNOWS

19" RACKMOUNT CASE WITH REMOVABLE RACK

SELECT CASE SIZE AND OPTIONS

CALL 1.800.500.ZERO (9376)

FAX 1.801.292.9450

TO LEARN MORE VISIT ABOUT ZERO CASES

VISIT WWW.ZEROCASES.COM

Four Rapid Release
Spring-Loaded
Captive Fasteners



Heavy Duty
Handles



EZ-Glide
Nylon Rails



Mid-stop Position
Allows for Slide-out
Operation and Service

Rugged Steel Rails

Pressure
Relief Valve



WARRIOR ZDRR 4U-8U

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D+E	CASE HEIGHT in/mm F	VOLUME cubic ft/m	WEIGHT lb/kg	SWAY +/-	ZERO PART#	NSN
----------------------------	-----------------------------	-----------------------------	---------------------------------	------------------------------	----------------------	-----------------	-------------	---------------	-----

WARRIOR ZDRR includes a
Removable, Shock Mount 19" Rack.

All weights are approximate.

Std load range: 20-80 lbs (9.1-36.3 kg)

+/- = Sway space to be increased or
decreased dependent on selection.

Drawing Specifications:




Cover Height: 03 = 4.5 in (114.3 mm)

(Exterior) 05 = 6.5 in (165.1 mm)

Inside Depth: 03 = 3.0 in (76.2 mm)

05 = 5.0 in (127 mm)

Case Width G = 27.25 in (692 mm)



ZERO
www.zerocases.com

©2015 ZERO MANUFACTURING INC. ALL RIGHTS
RESERVED. ZERO reserves the right to modify
product specifications, features and information.
Technical information is known to be correct at the
time of publication.

4U 7.12" (181 mm)	21/534	18/457	9/229	16.00/406	7.7/.22	51.0/21.2		ZDRR042118-0303	
			11/279		7.9/.22	52.0/21.7		ZDRR042118-0305	
			13/330		8.4/.24	53.0/22.6		ZDRR042118-0505	
	24/610	21/534	9/229	16.00/406	8.4/.24	56.0/24.4		ZDRR042421-0303	
			11/279		8.7/.25	57.0/24.9		ZDRR042421-0305	
			13/330		9.2/.26	58.0/25.8		ZDRR042421-0505	
	27/686	24/610	9/229	16.00/406	8.4/.24	58.5/26.0		ZDRR042724-0303	
			11/279		8.7/.25	59.5/26.5		ZDRR042724-0305	
			13/330		9.2/.26	60.5/27.4		ZDRR042724-0505	
	30/762	27/686	9/229	16.00/406	8.4/.24	61.0/27.6		ZDRR043027-0303	
			11/279		8.7/.25	62.0/28.1		ZDRR043027-0305	
			13/330		9.2/.26	64.0/29.0		ZDRR043027-0505	
5U 8.87" (225 mm)	21/534	18/457	9/229	17.75/451	8.0/.23	64.5/29.2		ZDRR052118-0303	
			11/279		8.8/.25	65.5/29.7		ZDRR052118-0305	
			13/330		9.3/.26	67.5/30.6		ZDRR052118-0505	
	24/610	21/534	9/229	17.75/451	8.9/.25	71.5/32.4		ZDRR052421-0303	
			11/279		9.7/.27	72.5/32.9		ZDRR052421-0305	
			13/330		10.2/.29	74.5/33.8		ZDRR052421-0505	
	27/686	24/610	9/229	17.75/451	9.8/.28	75.05/34.0		ZDRR052724-0303	8145-01-582-8695
			11/279		10.6/.30	76.05/34.5		ZDRR052724-0305	8145-01-582-8698
			13/330		11.1/.31	78.05/35.4		ZDRR052724-0505	
	30/762	27/686	9/229	17.75/451	10.9/.31	78.56/35.6		ZDRR053027-0303	8145-01-582-8700
			11/279		11.4/.32	79.56/36.1		ZDRR053027-0305	8145-01-582-8704
			13/330		12.0/.34	81.56/37.0		ZDRR053027-0505	
6U 10.63" (270 mm)	24/610	21/534	9/229	17.75/451	10.8/.31	70.22/30.2	+/-	ZDRR062421-0303	
			11/279		11.3/.32	68.22/31.2	+/-	ZDRR062421-0305	
			13/330		12.0/.34	70.72/32.1	+/-	ZDRR062421-0505	
	27/686	24/610	9/229	17.75/451	10.8/.31	71.22/32.3	+/-	ZDRR062724-0303	8145-01-582-8712
			11/279		11.3/.32	72.22/32.8	+/-	ZDRR062724-0305	8145-01-582-8718
			13/330		12.0/.34	74.22/33.7	+/-	ZDRR062724-0505	
	30/762	27/686	9/229	17.75/451	11.7/.33	74.73/33.9	+/-	ZDRR063027-0303	8145-01-582-5545
			11/279		12.3/.35	75.73/34.4	+/-	ZDRR063027-0305	8145-01-582-5818
			13/330		12.9/.37	77.73/35.3	+/-	ZDRR063027-0505	
7U 12.37" (314 mm)	24/610	21/534	9/229	21.25/540	12.0/.34	71.88/32.8		ZDRR072421-0303	
			11/279		12.7/.36	72.88/33.2		ZDRR072421-0305	
			13/330		13.4/.38	74.88/34.1		ZDRR072421-0505	
	27/686	24/610	9/229	21.25/540	12.0/.34	74.39/33.7		ZDRR072724-0303	8145-01-582-5824
			11/279		12.7/.36	75.39/34.2		ZDRR072724-0305	8145-01-582-5855
			13/330		13.4/.38	77.39/35.1		ZDRR072724-0505	
	30/762	27/686	9/229	21.25/540	13.0/.37	76.90/34.9		ZDRR073027-0303	8145-01-582-5894
			11/279		13.7/.39	77.90/35.3		ZDRR073027-0305	8145-01-582-5876
			13/330		14.4/.41	79.90/36.2		ZDRR073027-0505	
8U 14.12" (358 mm)	24/610	21/534	9/229	21.25/540	13.0/.37	77.05/34.8	+/-	ZDRR082421-0303	
			11/279		13.7/.39	78.05/35.3	+/-	ZDRR082421-0305	
			13/330		14.5/.41	80.05/36.2	+/-	ZDRR082421-0505	
	27/686	24/610	9/229	21.25/540	13.0/.37	79.56/36.0	+/-	ZDRR082724-0303	8145-01-582-5897
			11/279		13.7/.39	80.56/36.5	+/-	ZDRR082724-0305	8145-01-582-5898
			13/330		14.5/.41	82.56/37.4	+/-	ZDRR082724-0505	
	30/762	27/686	9/229	21.25/540	14.1/.40	82.07/37.2	+/-	ZDRR083027-0303	8145-01-584-7882
			11/279		14.8/.42	83.07/37.7	+/-	ZDRR083027-0305	8145-01-582-5909
			13/330		15.6/.44	85.07/38.6	+/-	ZDRR083027-0505	

ZERO KNOWS

19" RACKMOUNT SERIES

WARRIOR STORAGE CASE

BUYERS GUIDE AND PART NUMBER BUILDER

SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE
FOR QUESTIONS, CALL 1.800.959.5050, FOR A QUOTE CALL, FAX OR EMAIL

CASE NUMBER

ZDC **U SIZE** **BODY** **FRONT** **REAR** **00** **00** **00**

U SIZE
☐ 04-4U
☐ 05-5U
☐ 06-6U
☐ 07-7U
☐ 09-9U
☐ 11-11U
☐ 14-14U

BODY DEPTH
☐ 21"
☐ 24"
☐ 27"
☐ 30"

COVERS (INTERIOR DEPTH)
☐ 03-3"/76 mm
☐ 05-5"/127 mm

COLORS
☐ BK-Black 27040
☐ DB-Dark Blue 25102
☐ DS-Desert Sand 33446
☐ FG-Forest Green 24052
☐ GR-Gray 26270
☐ MB-Maroon PMS 202
☐ MB-Medium Blue 25190
☐ NA-Natural
☐ NG-NATO Green RAL6014
☐ OD-Olive Drab 24097
☐ OR-Orange 12197
☐ RD-Red 21105
☐ WH-White 27925
☐ YW-Yellow 23785

Color numbers to FED-STD-595 for reference.

ENVIRONMENT
☐ 00-None Required
☐ HI-Humidity Indicator
☐ PV-Pressure Valve
COMBINATIONS
☐ PH-PV, HI
☐ WT-Watertight, PV
☐ WV-WT, HI, PV
Watertight may not be combined with Locking Hasp.

SHOCK MOUNTS
☐ 00-None Required

HARDWARE
☐ 00 - Standard: Zinc Chromate Handle and Hardware
☐ LL - Zinc Chromate Handle and Hardware, Locking Hasp
☐ BH - Black Metal Handle and Hardware
☐ BL - Black Metal Handle, Hardware, Locking Hasp
☐ PO - Plastic Black Handle, Zinc Hardware
☐ PB - Plastic Black Handle, Black Hardware
☐ PS - Plastic Black Handle, Stainless Steel Hardware
☐ P1 - Plastic Black Handle, Zinc Hardware, Locking Hasp
☐ P2 - Plastic Black Handle, Stainless Steel Hardware, Locking Hasp
☐ P3 - Plastic Black Handle, Black Hardware, Locking Hasp
☐ SS - Stainless Steel Handle and Hardware
☐ LS - Stainless Steel Handle and Hardware, Locking Hasp
Handle material types may not be combined.

RACK HOLES
☐ 00-None Required

SHELVES/DRAWERS
☐ 00-None Required

OTHER OPTIONS
☐ 00-None Required
☐ CA-Removable Casters (4)
☐ CH-Card Holder
☐ CR-Chair
☐ CS-Coupling Straps
☐ LR-Lifting/Tie Down Rings
☐ SP-Storage Pouch
☐ TB-Table
COMBINATIONS
☐ Z1-CH, SP
☐ Z2-CA, CS
☐ Z3-CA, CH, CS, SP
☐ Z4-CA, CH, CS, LR, SP
☐ Z5-CH, LR
☐ Z6-CS, SP
☐ ZC-CA, LR
☐ ZD-CA, CH, LR
☐ ZE-CA, CH, LR, SP
☐ ZF-CA, SP

WARRIOR ZDC is a rotomolded, double entry case, designed and engineered for your storage needs. The Warrior Case meets the rigors of virtually all conditions including extreme altitude, rain, sleet, snow, sand, temperatures, and dust.

WARRIOR KEY FEATURES AND BENEFITS

- Flexibility to build to custom needs
- Strong, lightweight polyethylene construction
- Variety of standard and custom finishes and colors
- Portable, stackable and versatile.
- Meets applicable ATA 300, Category 1 Specification
- Stack with Warrior cases without removing caster plates

Call 1.800.500.9376

for engineering & design assistance
to meet specific requirements and
customization.



Lifting Rings: Verify the application does not exceed the load carrying capacity of the lifting rings or case.

Stacking: Verify weight and support.

NOTES: Quick-Ship not available for ZDC cases.
 ⚡ Watertight not available with Locking Hasps.



www.zerocases.com

HOW TO ORDER CASES

Standard Cases:

1. Go to www.zerocases.com/contact-us.html to find your local distributor or reseller.
2. Call 800-959-5050 or email orders@zerocases.com to place an order directly with ZERO.

Customized Cases:

1. Go to www.zerocases.com/contact-us.html to find your local representative and request a quote or email your RFQ to quotes@zerocases.com.

ZERO MANUFACTURING, INC. | 500 West 200 North, North Salt Lake, Utah 84054 USA

Toll Free US 800-500-ZERO (9376) | Direct 801-298-5900 | Fax 801-292-9450 | Email sales@zerocases.com | Web www.zerocases.com

WARRIOR ZDC 4U-14U

ZERO KNOWS 19" RACKMOUNT SERIES WARRIOR STORAGE CASE

CALL 1.800.500.ZERO (9376)
FAX 1.801.292.9450
VISIT WWW.ZEROCASES.COM

CONVENIENT STORAGE CASES TO MATCH ZERO'S WARRIOR LINE OF SHOCKMOUNT CASES

TO ORDER ZERO'S WARRIOR CASES
SELECT CASE SIZE AND OPTIONS
USING THE PART NUMBER BUILDER
CALL TODAY FOR CUSTOM ORDERS

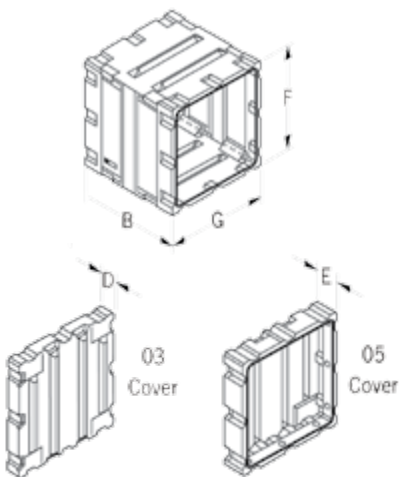
Need a special configuration?
Size? Color? ZERO's engineers
and designers can modify or
create original designs to meet
your specifications.

WARRIOR ZDC Case is without a rack.
All weights are approximate.
Drawing Specifications:

Cover Height: 03 = 4.5 in (114.3 mm)
(Exterior) 05 = 6.5 in (165.1 mm)

Inside Depth: 03 = 3.0 in (76.2 mm)
05 = 5.0 in (127 mm)

Case Width G = 27.25 in (692 mm)



ZERO
www.zerocases.com

©2015 ZERO MANUFACTURING INC. ALL RIGHTS
RESERVED. ZERO reserves the right to modify product
specifications, features and information. Technical
information is known to be correct at the time of
publication.

EIA UNITS in/mm A	BODY DEPTH in/mm B	COVER HEIGHT in/mm D + E	CASE HEIGHT in/mm F	VOLUME cubic ft/m	WEIGHT lb/kg	ZERO PART#	NSN
4U 7.12" (181 mm)	21/534	9/229	16.00/406	7.7/.22	46/20.8	ZDR0421-0303	
		11/279		7.9/.22	47/21.6	ZDR0421-0305	
		13/330		8.4/.24	49/22.2	ZDR0421-0505	
	24/610	9/229	16.00/406	8.4/.24	49/22.2	ZDC0424-0303	
		11/279		8.7/.25	50/22.8	ZDC0424-0305	
		13/330		9.2/.26	52/23.6	ZDC0424-0505	
	27/686	9/229	16.00/406	9.1/.26	52/23.6	ZDC0427-0303	8145-01-582-5723
		11/279		9.5/.27	53/24.0	ZDC0427-0305	
		13/330		10.0/.28	55/25.0	ZDC0427-0505	
	30/762	9/229	16.00/406	9.8/.28	55/25.0	ZDC0430-0303	8145-01-582-5748
		11/279		10.3/.29	56/25.4	ZDC0430-0305	
		13/330		10.8/.31	58/26.3	ZDC0430-0505	
5U 8.87" (225 mm)	21/534	9/229	17.75/451	7.6/.22	56/25.4	ZDR0521-0303	
		11/279		9.0/.25	57/25.8	ZDR0521-0305	
		13/330		9.3/.26	59/26.8	ZDR0521-0505	
	24/610	9/229	17.75/451	8.7/.25	59/26.8	ZDC0524-0303	
		11/279		9.8/.28	60/27.2	ZDC0524-0305	
		13/330		10.2/.29	62/28.1	ZDC0524-0505	
	27/686	9/229	17.75/451	9.8/.28	62/28.1	ZDC0527-0303	8145-01-582-5763
		11/279		10.6/.30	63/28.6	ZDC0527-0305	
		13/330		11.1/.31	65/29.5	ZDC0527-0505	
	30/762	9/229	17.75/451	10.9/.31	65/29.5	ZDC0530-0303	8145-01-582-5778
		11/279		11.4/.32	66/30.0	ZDC0530-0305	
		13/330		12.0/.34	68/30.9	ZDC0530-0505	
7U 12.37" (314 mm)	24/610	9/229	21.25/540	11.0/.31	59/26.8	ZDC0724-0303	
		11/279		11.7/.33	60/27.2	ZDC0724-0305	
		13/330		12.4/.35	62/28.1	ZDC0724-0505	
	27/686	9/229	21.25/540	12.0/.34	61/27.7	ZDC0727-0303	8145-01-582-5784
		11/279		12.7/.36	62/28.1	ZDC0727-0305	
		13/330		13.4/.38	64/29.1	ZDC0727-0505	
	30/762	9/229	21.25/540	13.0/.37	63/28.6	ZDC0730-0303	8145-01-582-5970
		11/279		13.7/.39	64/29.1	ZDC0730-0305	
		13/330		14.4/.41	66/30.0	ZDC0730-0505	
9U 15.87" (403 mm)	24/610	9/229	24.75/629	12.2/.35	69/31.3	ZDC0924-0303	
		11/279		13.6/.38	70/31.8	ZDC0924-0305	
		13/330		14.3/.40	72/32.7	ZDC0924-0505	
	27/686	9/229	24.75/629	13.7/.39	71/32.2	ZDC0927-0303	8145-01-582-5980
		11/279		14.8/.42	72/32.7	ZDC0927-0305	
		13/330		15.6/.44	74/33.6	ZDC0927-0505	
	30/762	9/229	24.75/629	15.2/.43	73/33.1	ZDC0930-0303	8145-01-582-5988
		11/279		16.0/.45	74/33.6	ZDC0930-0305	
		13/330		16.7/.47	76/34.5	ZDC0930-0505	
11U 19.38" (492 mm)	24/610	9/229	28.25/718	14.7/.42	74/33.6	ZDC1124-0303	
		11/279		15.6/.44	75/34.1	ZDC1124-0305	
		13/330		16.5/.47	77/35.0	ZDC1124-0505	
	27/686	9/229	28.25/718	16.0/.45	76/34.5	ZDC1127-0303	8145-01-582-6049
		11/279		16.9/.48	77/35.0	ZDC1127-0305	
		13/330		17.8/.50	79/35.9	ZDC1127-0505	
	30/762	9/229	28.25/718	17.3/.49	78/35.4	ZDC1130-0303	8145-01-582-6058
		11/279		18.2/.52	79/35.9	ZDC1130-0305	
		13/330		19.1/.54	81/36.8	ZDC1130-0505	
14U 24.62" (625 mm)	24/610	9/229	33.50/851	17.2/.49	78/35.4	ZDC1424-0303	
		11/279		18.4/.52	79/36.0	ZDC1424-0305	
		13/330		19.3/.55	81/36.8	ZDC1424-0505	
	27/686	9/229	33.50/851	18.9/.53	80/36.3	ZDC1427-0303	8145-01-582-5596
		11/279		20.0/.57	81/36.8	ZDC1427-0305	
		13/330		21.0/.59	83/37.6	ZDC1427-0505	
	30/762	9/229	33.50/851	20.6/.58	82/37.2	ZDC1430-0303	8145-01-582-5603
		11/279		21.6/.61	83/37.6	ZDC1430-0305	
		13/330		22.7/.64	85/38.6	ZDC1430-0505	